




vulcan® Combo Plus

Key performance


- Improved **reboundability** and **striking absorption**
- Increased **flexibility** and easier the **handling** and the **machine set up**
- Improvement of half tone reproduction and overall **print quality**
- Enhancement of **smash resistance**
- Increase of blanket **lifetime**

MAIN APPLICATION Commercial Sheetfed, Packaging, Metal Decorating

Vulcan Combo Plus is available in 3 ply, (1,96 mm) thickness.



Standard

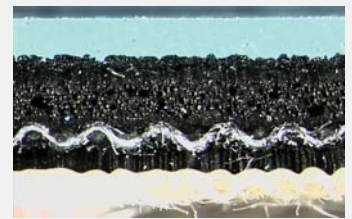

Vulcan Combo Plus



The product at a glance

INK COMPATIBILITY	Hybrid
PRINTING SURFACE COLOUR	Light blue
THICKNESS (mm)	1,96
AVERAGE LOAD VALUE N/cm2 @ 0,23 mm Indentation	250
SURFACE ROUGHNESS (Ra micron)	0,6
ELONGATION (%)	<0,9
TENSILE STRENGTHS (N/mm)	>60
WATER & SOLVENT PROTECTION	No
ADDITIONAL INFORMATION	
INK TRANSFER	Suitable for printing using both UV and conventional inks

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION
PLEASE REFER TO YOUR SALES MANAGER
OR EMAIL US AT: printing@trelleborg.com**